


2-4 Taping specifications for radial type.

■ Miniature Type

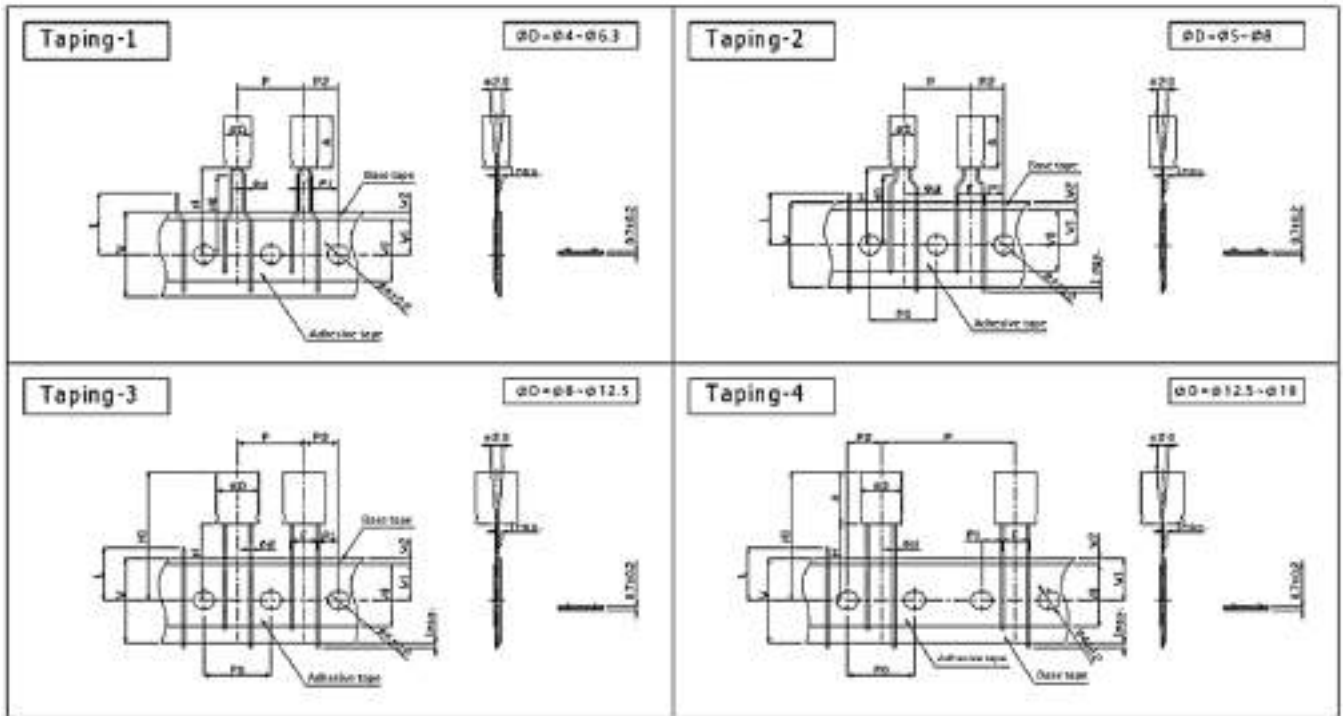

■ Dimensions

Code	Case size		Ød	P	P0	P1	P2	F	W	W0	W1	W2	H	H0	H1	L	Drawing
	ØD	A															
Tol.	±0.5	※ 1)	±0.05	±1.0	±0.2	±0.7	±1.0	+0.8 -0.2	±0.5	mm	±0.5	max.	±0.75	±0.5	-	max.	
Nominal	4	5~7	0.45	12.7	12.7	5.1	6.35	2.5	18.0	12.0	9.0	1.5	18.2	-	Please check the specification of insertion machine	11.0	Taping-1
						3.85		5.0					17.5	16.0			Taping-2
	5	5~7	0.45	12.7	12.7	5.1	6.35	2.5	18.0	12.0	9.0	1.5	18.2	-		11.0	Taping-1
						3.85		5.0					17.5	16.0			Taping-2
	6.3	11~15	0.5	12.7	12.7	5.1	6.35	2.5	18.0	12.0	9.0	1.5	18.5	-		11.0	Taping-2
						3.85		5.0					18.5	16.0			
	6.3	5~7	0.45	12.7	12.7	5.1	6.35	2.5	18.0	12.0	9.0	1.5	18.2	-		11.0	Taping-3
						3.85		5.0					17.5	16.0			Taping-2
	6.3	9~15	0.5	12.7	12.7	5.1	6.35	2.5	18.0	12.0	9.0	1.5	18.5	-		11.0	Taping-3
						3.85		5.0					18.5	16.0			Taping-2
	8	5 ※2)	0.45	12.7	12.7	5.1	6.35	2.5	18.0	12.0	9.0	1.5	18.2	-		11.0	Taping-3
						3.85		5.0					17.5	16.0			Taping-2
8	7	0.45	12.7	12.7	5.1	6.35	3.5	18.0	12.0	9.0	1.5	20.0	-	11.0	Taping-3		
					3.85		5.0					18.5	16.0		Taping-1		
8	9~15	0.5(0.6)	12.7	12.7	5.1	6.35	3.5	18.0	12.0	9.0	1.5	18.5	-	11.0	Taping-3		
					3.85		5.0					18.5	16.0		Taping-2		
Tol.	±0.5	max.	±0.05	±1.0	±0.3	±0.7	±1.3		±0.5	min.	±0.5	max.	±0.75	-		max.	
Nominal	10	27	0.6	12.7	12.7	3.85	6.35	5.0	18.0	12.0	9.0	1.5	18.5	-	Please check the specification of insertion machine	11.0	Taping-3
			0.6	15.0	15.0	5.0	7.5	5.0	18.0	12.0	9.0	1.5	18.5	-		11.0	Taping-3
	0.6 ●	25.4	12.7	3.85	6.35	5.0	18.0	12.0	9.0	1.5	18.5	-	11.0	Taping-4			
	16	37.5	0.8	30.0	15.0	3.75	7.5	7.5	18.0	12.0	9.0	3.0	18~20	-		11.0	Taping-4
18	37.5	0.8	30.0	15.0	3.75	7.5	7.5	18.0	12.0	9.0	3.0	18~20	-	11.0	Taping-4		

● P=25.4 Taping is not standard, please use P=15mm taping.

※ 1) Refer to the drawing of each taping for tolerance.

※ 2) Ø8 x 5L Product is 6.5mm max.